


TUBING

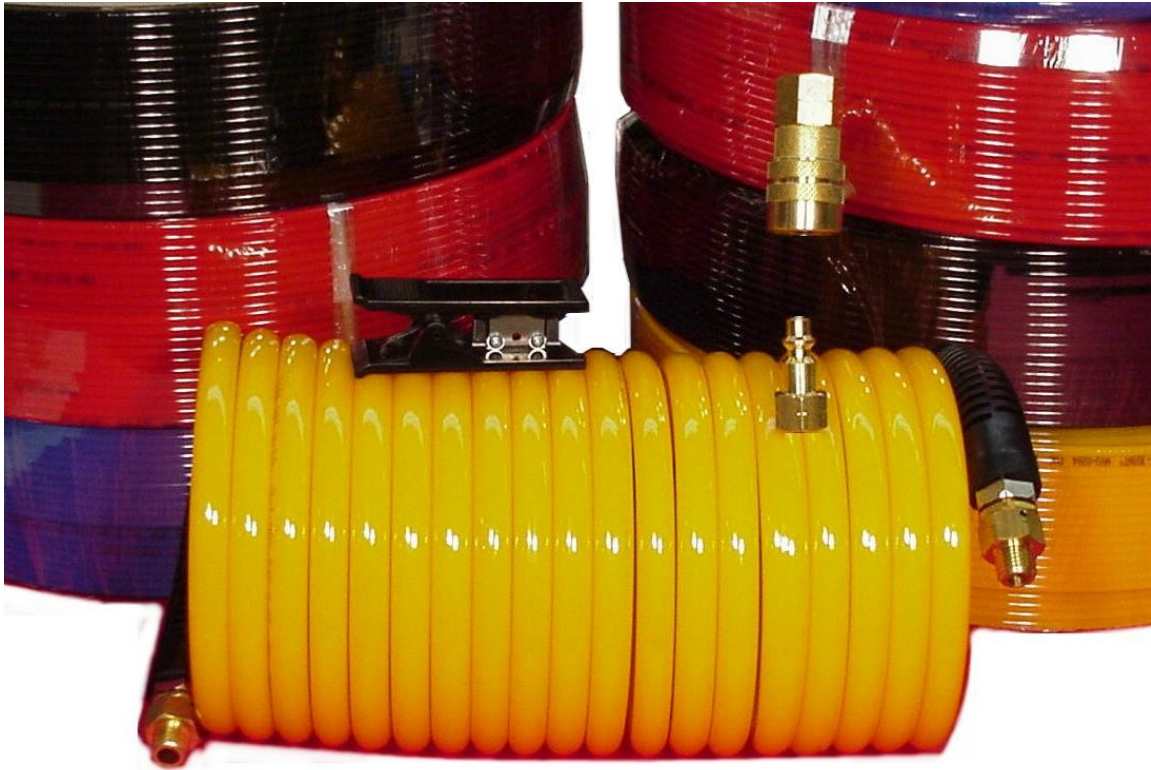

<p>POLYURETHANE: TEMPERATURE RANGE: -40 F TO 180 F WORKING PRESSURE: 0 -160 PSI MIN. BURST PRESSURE: 400 PSI FEATURES: BETTER FLEXIBILITY ABRASION RESISTANT</p>	<p>NYLON: TEMPERATURE RANGE: -40 F TO 195 WORKING PRESSURE: 0 – 250 PSI MIN. BURST PRESSURE: 800 PSI FEATURES: HIGHER TEMP & BURST PRESSURE MORE RIGID</p>	<p>POLYETHYLENE: TEMPERATURE RANGE: -40 F TO 140 WORKING PRESSURE: 0 – 100 PSI MIN. BURST PRESSURE: 350 PSI FEATURES: NON-POISONOUS CHEMICAL RESISTANT</p>
---	---	---

HOW TO ORDER: PART NUMBER – COLOR –LENGTH IN FEET

AVAILABLE COLORS IN PE & PU: B = BLUE L = BLACK O = ORANGE
 Y = YELLOW T = TRANSPARENT

AVAILABLE COLORS IN NYLON: B = BLUE L = BLACK O = ORANGE
 Y = YELLOW T = TRANSPARENT

POLYURETHANE				NYLON				POLYETHYLENE			
P/N	O.D.	I.D.		P/N	O.D.	I.D.		P/N	O.D.	I.D.	
PU4T	4MM	2MM		NY4T	4MM	2MM		PE4T	4MM	2MM	
PU532T	5/32"	2MM		NY532T	5/32"	2MM		PE532T	5/32"	2MM	
PU14	1/4"	4MM		NY14	1/4"	4MM		PE14	1/4"	4MM	
PU38	3/8"	6.5MM		NY38	3/8"	6.5MM		PE38	3/8"	6.5MM	
PU12	1/2"	3/8"		NY12	1/2"	3/8"		PE12	1/2"	3/8"	

OTHER INCH AND METRIC SIZES ARE AVAILABLE

NYLON & POLYURETHANE RECOIL TUBING



BOTH ENDS: 1/4" NPT MALE SWIVEL WITH HOSE PROTECTORS

TC – 1 TUBING CUTTER



NYR38-12	12FT (EXTENDED) YELLOW NYLON RECOIL AIR HOSE 3/8" O.D.
NYR38-25	25FT (EXTENDED) YELLOW NYLON RECOIL AIR HOSE 3/8" O.D.
NYR38-50	50FT (EXTENDED) YELLOW NYLON RECOIL AIR HOSE 3/8" O.D.
NYR12-12	12FT (EXTENDED) YELLOW NYLON RECOIL AIR HOSE 1/2" O.D.
NYR12-25	25FT (EXTENDED) YELLOW NYLON RECOIL AIR HOSE 1/2" O.D.
NYR12-50	50FT (EXTENDED) YELLOW NYLON RECOIL AIR HOSE 1/2" O.D.
PU516-12	12FT (EXTENDED) BLUE POLYURETHANE RECOIL AIR HOSE 5/16" O.D.
PU516-25	25FT (EXTENDED) BLUE POLYURETHANE RECOIL AIR HOSE 5/16" O.D.
PU516-50	50FT (EXTENDED) BLUE POLYURETHANE RECOIL AIR HOSE 5/16" O.D.

CP-1 COUPLER PLUG



C – 1 COUPLER

