




## 100 SERIES HOSE NIPPLE CONNECTION 3/2 NC/NO DIRECT ACTING

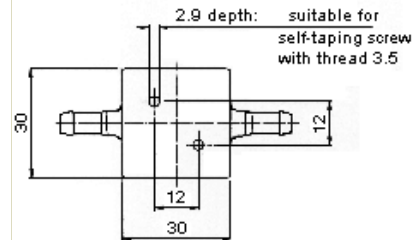

DIMENSIONS IN MILLIMETERS

### TECHNICAL INFORMATION:

MEDIA: COMPRESSED AIR AND OTHER INERT GASES  
(FOR USE WITH OTHER MEDIA CONSULT CUSTOMER SERVICE.)

AMBIENT TEMPERATURE: -20 C TO +50 C

RELATIVE DUTY CYCLE: 100%  
INSULATION CLASS: F (ACC. TO DIN VDE 580)

DEGREE OF PROTECTION: IP65 (DUST TIGHT & WATER TIGHT)

MATERIALS:  
PLUNGER & CORE: SPECIAL CUSTOM MADE CORROSION RESISTANT CR-NI-STEEL AND COPPER SHADING RING  
ARMATURE TUBE: BRASS  
THERMOPLASTIC (POLYAMIDE) MOLDED COIL  
POWER CONSUMPTION: 6W DC & 9.3VA 50/60 HZ  
SEALS: VITON  
BODY: POLYAMIDE  
STANDARD VOLTAGES: 110VAC, 220VAC, 12VDC, & 24VDC  
VOLTAGE TOLERANCE: +/- 10%

- ◆ COIL CAN BE ROTATED 360 DEGREES
- ◆ COIL CAN BE CHANGED UNDER PRESSURE
- ◆ FAST AND EASY CONNECTION
- ◆ EXPLOSION-PROOF VERSION AVAILABLE