


300 SERIES 2/2 PILOT ACTING SOLENOID VALVE 2" NPT

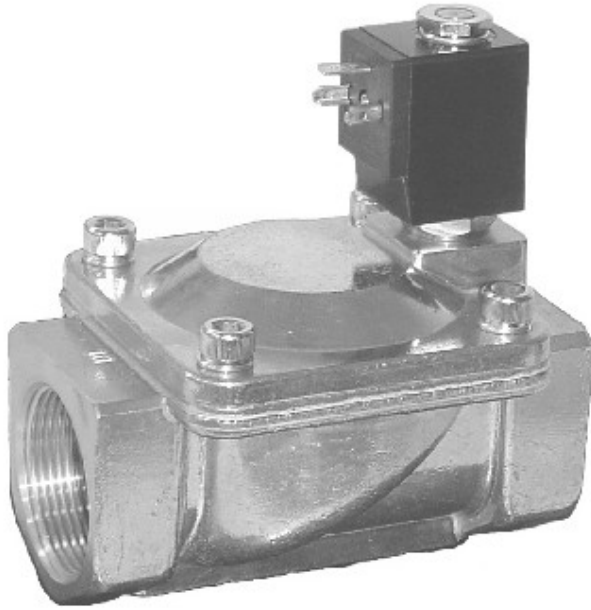

TECHNICAL INFORMATION:

MEDIA: COMPRESSED AIR, WATER, VACUUM, AND OTHER INERT GASES
(FOR USE WITH OTHER MEDIA CONSULT CUSTOMER SERVICE.)

AMBIENT TEMPERATURE: -20 C TO +50 C

RELATIVE DUTY CYCLE: 100%

INSULATION CLASS: F (ACC. TO DIN VDE 580)

DEGREE OF PROTECTION: 1P65 (DUST TIGHT & WATER TIGHT)

MATERIALS:

ARMATURE TUBE: SPECIAL CUSTOM MADE CORROSION RESISTANT CR-NI-STEEL

PLUNGER : ELECTROLESS NICKEL PLATED STEEL

EPOXY MOLDED COIL

POWER CONSUMPTION: 15W DC & 22VA/50HZ - 19VA/60HZ

SEALS: VITON (DIAPHRAGM)

BODY: BRASS

STANDARD VOLTAGES: 110VAC, 220VAC, 12VDC, & 24VDC

VOLTAGE TOLERANCE: +/- 10%

Function	Orifice Size mm	Pressure PSI Max.	Flow Factor	Add voltage to get part number ex. SS322-110vac
2/2 NC	50	7-140	48	SS322-

**NOTE SHOWN WITH TYPE 2 DIN CONNECTOR
(CONNECTOR MUST BE ORDERED SEPARATLY)**

NOTE: SHOWN WITH TYPE 2 DIN CONNECTOR
(CONNECTOR MUST BE ORDERED SEPARATLY)

- **COIL CAN BE ROTATED 360 DEGREES**
- **COIL CAN BE CHANGED UNDER PRESSURE**
- **FAST RESPONSE**
- **ABLE TO HANDLE MORE PRESSURE THAN DIRECT ACTING**
- **INSTALLATION: SLANT PIPE OR WATER LEVEL**
- **DIE CAST BRASS BODY**
- **AVAILABLE ONLY STAINLESS STEEL VERSION**

DIMENSIONS	A	B	C
IN MILLIMETERS	160	160	112