


**300 SERIES 2/2 NC PILOT ACTING
SOLENOID VALVE 3/8" & 1/2" NPT**

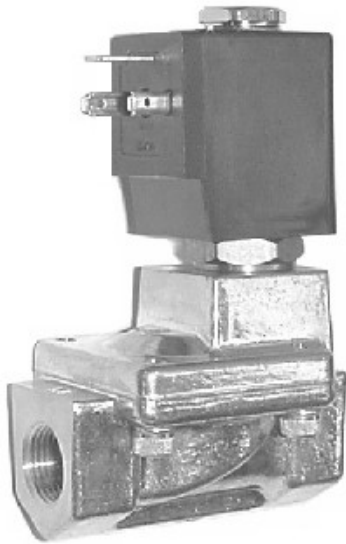

TECHNICAL INFORMATION:

MEDIA: COMPRESSED AIR, WATER, VACUUM, AND OTHER INERT GASES
(FOR USE WITH OTHER MEDIA CONSULT CUSTOMER SERVICE.)

AMBIENT TEMPERATURE: -20 C TO +50 C

RELATIVE DUTY CYCLE: 100%

INSULATION CLASS: F (ACC. TO DIN VDE 580)

DEGREE OF PROTECTION: 1P65 (DUST TIGHT & WATER TIGHT)

MATERIALS:

ARMATURE TUBE: SPECIAL CUSTOM MADE CORROSION RESISTANT CR-NI-STEEL

PLUNGER : ELECTROLESS NICKEL PLATED STEEL

EPOXY MOLDED COIL

POWER CONSUMPTION: 15W DC & 22VA/50HZ - 19VA/60HZ

SEALS: VITON (DIAPHRAGM)

BODY: BRASS

STANDARD VOLTAGES: 110VAC, 220VAC, 12VDC, & 24VDC

VOLTAGE TOLERANCE: +/- 10%

PORT SIZE	FUNCTION	ORIFICE SIZE mm	PRESSURE PSI MAX.	FLOW FACTOR Cv	ADD VOLTAGE TO GET PART NUMBER EX: 338-110VAC
3/8"	2/2 NC	13	7 - 140	4.5	338-
1/2"	2/2 NC	13	7 - 140	4.5	312-

*NOTE: FOR STAINLESS STEEL VERSION USE PREFIX "SS" EXAMPLE:SS 338-120VAC

NOTE: SHOWN WITH TYPE 2 DIN CONNECTOR
(CONNECTOR MUST BE ORDERED SEPARTELY)

		<ul style="list-style-type: none"> • COIL CAN BE ROTATED 360 DEGREES • COIL CAN BE CHANGED UNDER PRESSURE • FAST RESPONSE • ABLE TO HANDLE MORE PRESSURE THAN DIRECT ACTING • INSTALLATION: SLANT PIPE OR WATER LEVEL • DIE CAST BRASS BODY • AVAILABLE IN STAINLESS STEEL
--	--	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

				VERSION
DIMENSIONS	A	B	C	
IN	66.	106.	48.0	
MILLIMETERS	5	5		

NOTE: SAME DIMENSIONS FOR 3/8" & 1/2"