


E4 – SERIES 4 - WAY AIR VALVES 5 PORTS - 2 & 3 POSITION SOLENOID OR AIR PILOT 1/8" NPT PORTS

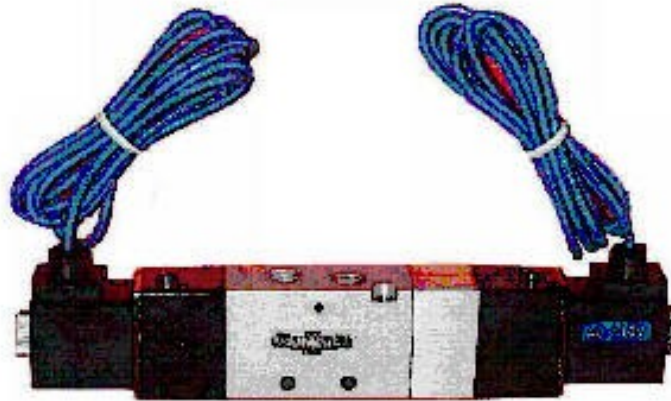

PILOT TYPE	POSITION	PART NUMBER
SINGLE SOLENOID	2 POSITION SPRING RETURN	E418SS2 - VOLTAGE
DOUBLE SOLENOID	2 POSITION	E418DS2 - VOLTAGE
DOUBLE SOLENOID	3 POSITION SPRING CENTERED & BLOCKED	E418DS3 - VOLTAGE
SINGLE AIR PILOT	2 POSITION SPRING RETURN	E418SAP2
DOUBLE AIR PILOT	2 POSITION	E418DAP2
DOUBLE AIR PILOT	3 POSITION SPRING CENTERED & BLOCKED	E418DAP3

TECHNICAL INFORMATION:

MEDIA	COMPRESS AIR (40 MICRO FILTERED)
PORTS	1/8" NPT
LUBRICATION	NONE REQUIRED
OPERATING PRESSURE	22-115 PSI
OPER. TEMPERATURE	15 TO 120 DEGREE SF
DUTY CYCLE	100%
VOLTAGE TOLERANCE	+10% OR -10%
STD. VOLTAGE	121VDC, 24VDC, 110VAC
COIL CONNECTION	18" FLYING LEADS OR OPTIONAL DIN CONN.
MANUAL OVERRIDE	"PUSH IN" NON-LOCKING MANUAL OVERRIDE
FLOW FACTOR	.62 CV -2 POSITION & .5 CV - 3 POSITION



TWO STATION MANIFOLD

HOW TO ORDER MANIFOLDS:

EXAMPLE: M412-02

M412 - MANIFOLD TYPE

02 = NUMBER OF STATIOND (UP TO 12)