


**H4 - SERIES
4 - WAY AIR VALVES
5 PORTS - 2 & 3 POSITION
SOLENOID OR AIR PILOT
1/2" NPT PORTS**

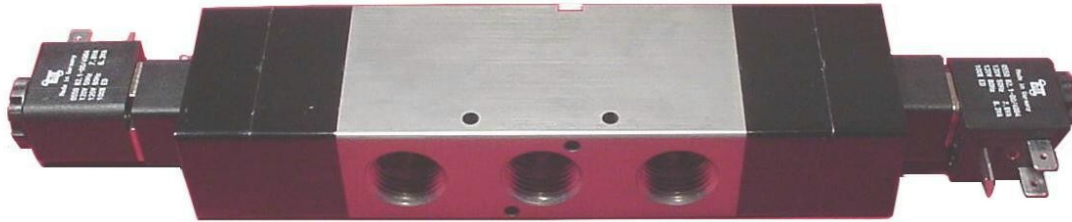

PILOT TYPE	POSITION	PART NUMBER
SINGLE SOLENOID	2 POSITION SPRING RETURN	E412SS2 - VOLTAGE
DOUBLE SOLENOID	2 POSITION	E412DS2 - VOLTAGE
DOUBLE SOLENOID	3 POSITION SPRING CENTERED & BLOCKED	E412DS3 - VOLTAGE
SINGLE AIR PILOT	2 POSITION SPRING RETURN	E412SAP2
DOUBLE AIR PILOT	2 POSITION	E412DAP2
DOUBLE AIR PILOT	3 POSITION SPRING CENTERED & BLOCKED	E412DAP3

TECHNICAL INFORMATION:

MEDIA	COMPRESSED AIR (40 MICRON FILTERED)
PORTS	½" NPT
LUBRICATION	NONE REQUIRED
OPERATING PRESSURE	22-115 PSI
OPER. TEMPERATURE	15 – 120 DEGREES
DUTY CYCLE	100%
VOLTAGE TOLERANCE	+10% OR -10%
STD. VOLTAGES	12VDC, 24VDC, 110VDC
COIL CONNECTION	DIN CONNECTION (DIN 40050 IP 165)
MANUAL OVERRIDE	TURN TO LOCK MANUAL OVERRIDE
FLOW FACTOR	3.9 CV – 2 POSITION & 3.0 CV – 3 POSITION



TWO STATION MANIFOLD

HOW TO ORDER MANIFOLDS:

EXAMPLE: M412-02

M412 - MANIFOLD TYPE

02 = NUMBER OF STATIOND (UP TO 12